SUHNER® COAXIAL CONNECTOR DATA SHEET
TYPE 24_MMCX-50-2-1/111_O

Description

Straight panel bulkhead cable jack, flange mount

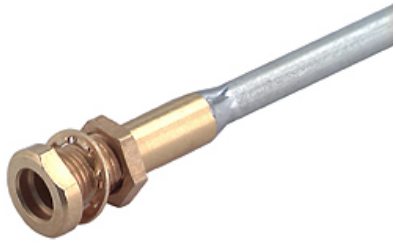

General Information

MMCX Interface dims acc. to:	SUHNER-MMCX
Weight:	0.0009 Kg / 0.03 oz

Cable

Cable type:	EZ_86-TP/M17

Cable Entry

Centre contact:	crimped
Outer contact:	soldered

Electrical Data

Impedance:	50Ω
Interface frequency max.:	6 GHz

Piece Parts	Material	Surface Plating
Center contact:	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact:	Brass	Gold Plating
Body:	Brass	Gold Plating
Insulator:	PFA / PTFE	
Fastening nut:	Brass	Gold Plating
Washer:	Bronze	Gold Plating

Attachments

Outline drawing:	DOU-00009970
Catalogue drawing:	DCA-00009291
Assembly instruction:	DOC-0000180170

Notes

Mounting hole:	DOU-00009144
Order as ***24_MMCX-50-2-1/111_OE***	for Single

WAIVER!
While the information contained in this folder has been carefully compiled to the best of our present knowledge, it is not intended as representation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be constructed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.

Issued: 13.11.03 14:21 | Document: DOC-0000187114

HUBER+SUHNER
HUBER+SUHNER AG
Interconnect Division
CH-9100 Herisau
Phone +41 (0)71 353 41 11
Fax +41 (0)71 353 45 90
http://www.hubersuhner.com